

Application data

Beam style	variable-spread, well-defined soft beam
Suitable for	theatre, clubs, small stage areas
Specification level	economy range
Beam angle	7° - 58°
Typical throw distance	2 - 10m

Electrical data

Supply Volts	230/240V AC single phase
Max. Lamp Watts	650W
Lamp base	GY9.5
Auto-disconnect	no
Cable/connection	1.5m, 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical data

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	55mm diameter glass
Lens	120mm diameter Pebble-Convex
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Stirrup rotates 360° around the body of the luminaire
Rear handle	yes
Weight/Packed weight	4.2kg / 4.8kg
Overall dimensions	210mm (w) x 305mm (d) x 193mm (h) max 280mm (h)
Packed volume	0.021m ³
Filter cut size	150 x 150mm
Accessory runners	3 slots
Safety guard	included
Colour frame	metal, 150x150mm, supplied
Lamp access	sliding top cover
Lens access	front and via lamp access

Operational data

Focus adjustment	slide focus with control underneath
Working position	max. tilting ±90° from horizontal
Beam Shaping	using barndoor accessory
Positional adjustment	single rim-clamp tilt lock

Lamp types

300W	M38
500W	M40, T18, T25
650W	T26, T27

LDR recommends Philips lamps

Accessories

Lamps	see above
Spare metal colour frame	■ 20100103 □ 20100103B ■ 20100103C
Spare safety guard	■ 201002103 □ 20100203B ■ 20100203C
4-leaf barndoor	■ 20100303 □ 20100303B ■ 20100303C
Hook clamp	20100900
Alu-grip clamp	20101100
Safety bond	20101200

* effect wheels and colour changers available on request

Photometric data

Spot focus	T27									
Beam dia.	0.2	0.4	0.5	0.6	0.7	0.9	1.0	1.1	1.2	m
lux	24800	11022	6200	3968	2756	2024	1550	1225	992	
Distance	2	3	4	5	6	7	8	9	10	m


Flood focus										
Beam dia.	2.2	3.3	4.4	5.5	6.7	7.8	8.9	10	11.1	m
lux	2148	955	537	344	239	175	134	106	86	
Distance	2	3	4	5	6	7	8	9	10	m

tempo[®] pc 650 plus


650W

pebble-convex

part number : ■ 10602000 □ 10602001 ■ 10602002

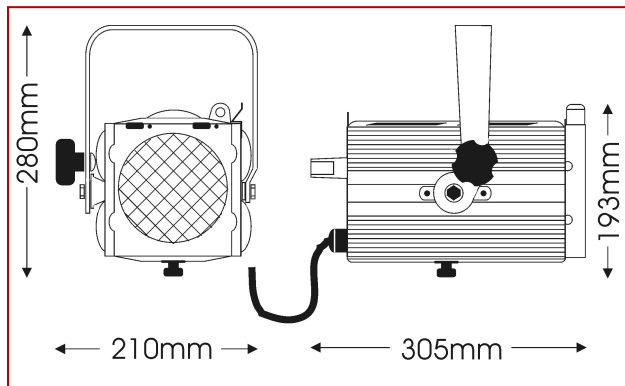

With a newly updated design, this simple PC spotlight has a slide-focus variable-spread beam offering more definition than the softer Fresnel beam and is ideal for close projection in small stage venues. A colour frame, safety guard and 1.5m mains cable are all included as standard. Available to special order in any colour from the RAL range



éclairage e.t. théâtre sa
 15, av. des Baumettes • 1020 Renens
 tél 021 637 77 25 • fax 021 637 77 27
 E-mail : info@eclairage-theatre.com
 Web : www.eclairage-theatre.com